

XB 260

FA 4x2 Rigid, 16t



*Some optional equipment maybe shown in this brochure

ENGINE

Power: XB 260, PACCAR PX-7 (189 kW / 257 hp)

Torque: 990 Nm @ 1,000 - 1,700 rpm

GVM

16,000 kg

GCM

28,000 kg

Max. front 6,000 kg

Max. rear 10,500 kg

CAB EXTERIOR

- Day Cab, mechanical suspension
- Central door locks with 2 remote controls, 2 keys
- External sun visor green translucent
- Main mirrors
- Front view mirror
- Electrically adjustable mirrors
- Halogen head lights
- Head light beam for left-hand traffic
- Daytime running lights with Fog & cornering lights in bumper

Optional

- Extended Cab, mechanical suspension
- Kerb view window passenger door

CAB INTERIOR

- Soft grip steering wheel
- Black dashboard finish
- Luxury air driver's seat with armrest
- Rigid passenger's seat
- Air conditioning
- Electric windows control

Optional

- Dual mate passenger seat

COLOURS

- Cab colour: Crystal White E1980
- Cab coloured side collar
- Cab coloured lamp/headlamp panel & bumper
- Black coloured mirror
- Chassis colour: Grey

Optional

- Chassis colour: Black

SUSPENSION & AXLES

- Front axle: 6.00t, parabolic, 60N
- Rear axle: 10.50t, DAF air, SR 1015

Optional

- Rear axle: 10.50t, parabolic, SR 1014

SAFETY REGULATIONS

- Manual isolation main switch
- SRS driver's air bag
- Anti-theft system, engine immobiliser
- Lane departure warning system
- Vehicle stability control
- Reverse warning
- Rear Camera with 5m cable
- DAF Side & Turn Assist
- Speed limiter setting 100 km/h
- Adaptive Cruise Control with Forward Collision Warning (FCW) & Advanced Emergency Braking System (AEBS)

COMMUNICATION

- FMS connector prepared
- Radio: DAF Infotainment FM/DAB/DAB+ with speakers including phone connectivity
- Antennas: AM/FM + GSM + GPS

DRIVELINE

- Engine: 189 kW (257 hp), PACCAR PX-7
- Euro 6 exhaust emission
- Auto engine stop 5 minutes
- Transmission: 8AP1000
- Gearbox ratio: 4.89-0.64
- Rear axle ratio: 4.10
- Mechanical differential lock with ASR

Optional Driveline Package

- Engine: 212 kW (287 hp), PACCAR PX-7
- Transmission: 8AP1200
- Rear axle ratio: 4.56

WHEELS & TYRES

- Goodyear tyres
- Front tyres: 285/70R19.5 KMAXS2 146/144
- Rear tyres: 285/70R19.5 KMAXD2 146/144
- Disc wheels steel, silvergrey
- Wheel protection rings

Optional

- Michelin tyres
- Front tyres: 285/70R19.5 XMZ 146/144
- Rear tyres: 285/70R19.5 XMD 146/144

CHASSIS

- Wheelbase 5.35m / rear overhang 2.96m
- Chassis rails: 270mm-6mm
- EAS unit right, discharge right rearward
- Plastic fuel tank 1x200L LHS
- LED tail lamps
- Spray suppression
- Front underrun protection
- Adblue tank 55L RHS

Optional

- Wheelbase 3.80m / rear overhang 2.03m
- Wheelbase 4.80m / rear overhang 2.63m
- EAS unit right, discharge vertical
- Aluminium fuel tank 1x340L LHS
- Adblue tank 30L RHS

ELECTRICAL POWER SUPPLY

- Alternator 80A, batteries 2 x 175Ah

AERODYNAMICS

- Preparation for roof spoiler & side collars

BODY & PREPARATION

- Engine speed control connector on chassis
- Body function application connector on chassis
- J1939 CAN application connector

BRAKE SYSTEM

- Auxiliary exhaust brake
- Parking brake control with test position
- ABS
- EBS
- Brakes discs on front & rear axle(s)

DRAWBAR & TRAILER EQUIPMENT

Optional

- Pneumatic trailer connection C type
- 24V trailer electric connection

GVM / GCM

- Max GVM 16,000 kg
- Max GCM 28,000 kg

POWER TAKE OFF (PTO)

- Gearbox PTO control, no first gearbox PTO

APPLICATION CONDITIONS

- Unheated moisture separator with pre-filter
- Air intake behind cab, high

SERVICE & MAINTENANCE


- Warranty: Vehicle 3yr, driveline 3yr / 200,000km
- Standard service interval

VEHICLE DELIVERY

- Standard toolkit

XB 260

FA 4x2 Rigid, 16t

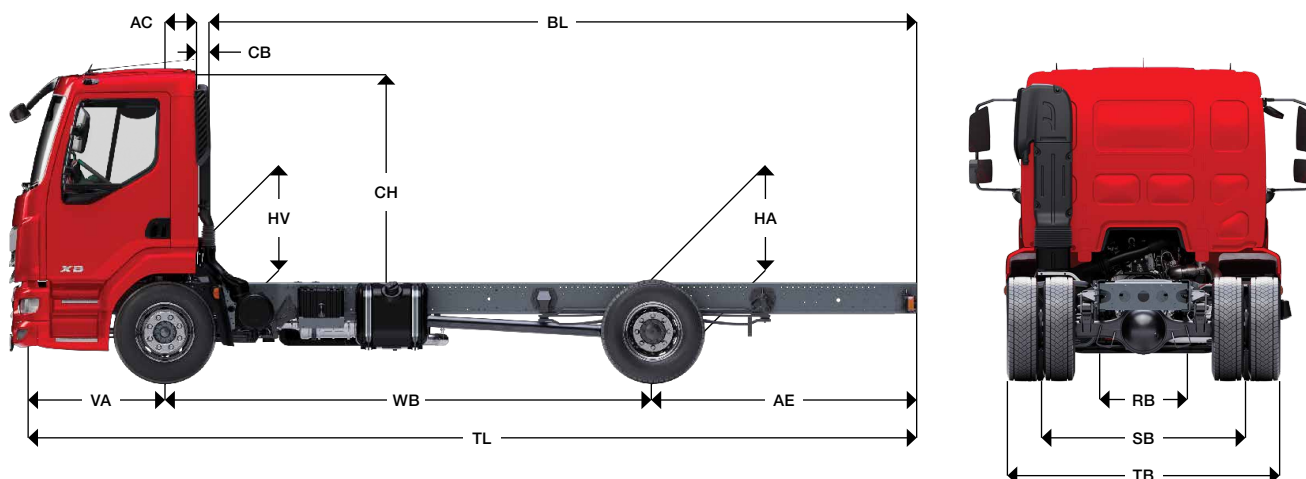

	Wheelbase		Unladen Weight†			Gross Carrying Capacity			Variable Dimensions								
	WB	AE¹	Front	Rear	Total	Front	Rear	Total	AC	CB²	CH	BL³	TL	HA⁴	HA⁵	TK⁶	TW⁷
DAY CAB	3.50	1.85	2925	1490	4415	3075	7510	10585	0.28	0.22	1.88	5.29	6.69	0.93	0.90	11.99	13.22
	3.80	2.03	2933	1499	4432	3067	7501	10568	0.28	0.22	1.88	5.77	7.17	0.93	0.90	12.73	13.98
	4.80	2.63	2963	1551	4514	3037	7449	10486	0.28	0.22	1.88	7.37	8.77	0.93	0.90	15.21	16.51
	5.35	2.96	2985	1587	4572	3015	7413	10428	0.28	0.22	1.88	8.25	9.65	0.93	0.90	16.58	17.90
EXTENDED CAB	3.50	1.85	2968	1534	4502	3032	7466	10498	0.68	0.22	1.88	4.89	6.69	0.93	0.90	11.99	13.22
	3.80	2.03	2970	1548	4518	3030	7452	10482	0.68	0.22	1.88	5.37	7.17	0.93	0.90	12.73	13.98
	4.80	2.63	3028	1573	4601	2972	7427	10399	0.68	0.22	1.88	6.98	8.77	0.93	0.90	15.21	16.51
	5.35	2.96	3052	1606	4658	2948	7394	10342	0.68	0.22	1.88	7.85	9.65	0.93	0.90	16.58	17.90
SLEEPER CAB	3.50	1.85	3045	1508	4553	2955	7492	10447	0.68	0.22	1.88	4.89	6.69	0.93	0.90	11.99	13.22
	3.80	2.03	3055	1516	4571	2945	7484	10429	0.68	0.22	1.88	5.37	7.17	0.93	0.90	12.73	13.98
	4.80	2.63	3088	1565	4653	2912	7435	10347	0.68	0.22	1.88	6.97	8.77	0.93	0.90	15.21	16.51
	5.35	2.96	3112	1599	4711	2888	7401	10289	0.68	0.22	1.88	7.85	9.65	0.93	0.90	16.58	17.90

Other Dimensions

VA	HV⁹	HV¹⁰	RB	SB	TB¹¹
1.34	0.94	0.89	0.79	1.75	2.33

1. Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

2. CB is based on standard air intake and/or exhaust.
3. Cab height is measured from frame member to closed cabin roof hatch.
4. Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

5. Unladen height at centre of driven axle(s).
6. Laden height at centre of driven axle(s).
7. Turning circle between kerbs.
8. Turning circle between walls.
9. Unladen height at centre of front axle(s).
10. Laden height at centre of front axle(s).
11. Overall width at rear

Note: All dimensions are in metres (m) and weights in kilograms (kg)

No rights can be derived from this publication. DAF Trucks Australia reserves the right to change product specifications without prior notice. For the most recent information, contact your authorised DAF dealer.

DAF Trucks Australia
66 Canterbury Road
Bayswater VIC 3153
Phone (03) 9721 1500