Specification Sheet

XB 290

FA 4x2 Rigid, 19t

*Some optional equipment maybe shown in this brochure

ENGINE
Power: XB 290, PACCAR PX-7 (212 kW / 287 hp) Torque: 1,090 Nm @ 1,100 - 1,600 rpm

GVM	GCM
19,000 kg	28,000 kg

Max. front 7,500 kg
Max. rear 11,500 kg

XB 290

FA 4x2 Rigid, 19t

CAB EXTERIOR

- Sleeper Cab, mechanical suspension
- Central door locks with 2 remote controls, 2 keys
- External sun visor green translucent
- Main mirrors
- Front view mirror
- Electrically adjustable mirrors
- Halogen head lights
- Head light beam orientated for left-hand traffic
- Daytime running lights with Fog & cornering lights in bumper

Optional

- Kerb view window passenger door

CAB INTERIOR

- Soft grip steering wheel
- Black dashboard finish
- Luxury air driver's seat with armrest
- Rigid passenger seat
- Curtains
- Normal level lower bunk
- Standard mattress
- Air conditioning
- Electric windows control

Optional

- Luxury air passenger seat

COLOURS

- Cab colour: Crystal White E1980
- Cab coloured side collar
- Cab coloured lamp/headlamp panel & bumper
- Black coloured mirror
- Chassis colour: Grey

Optional

- Chassis colour: Black

SUSPENSION & AXLES

- Front axle: 7.50t, parabolic, 152N
- Rear axle: 11.50t, DAF air, SR 11.32

SAFETY REGULATIONS

- Manual isolation main switch
- SRS driver's air bag
- Anti-theft system, engine immobiliser
- Lane departure warning system
- Vehicle stability control
- Reverse warning
- Rear Camera with 5m cable
- DAF Side & Turn Assist
- Speed limiter setting 100 km/h
- Adaptive Cruise Control with Foward Collision Warning (FCW) & Advanced Emergency Braking System (AEBS)

COMMUNICATION

- FMS connector prepared
- Radio: DAF Infotainment FM/DAB/DAB+ with speakers including phone connectivity
- Antennas: AM/FM + GSM + GPS

DRIVELINE

- Engine: 212 kW (287 hp), PACCAR PX-7
- Euro 6 exhaust emission
- Auto engine stop 5 minutes
- Transmission: 8AP1200
- Gearbox ratio: 4.89-0.64
- Rear axle ratio: 5.13
- Mechanical differential lock with ASR

XB 290

FA 4x2 Rigid, 19t

WHEELS & TYRES

- Goodyear tyres
- Front tyres: 315/80R22.5 KMAXS3 158/150
- Rear tyres: 295/80R22.5 KMAXD2 152/148
- Disc wheels Alu Alcoa Dura-Bright
- Wheel protection rings

Optional

- Michelin tyres
- Front tyres: 315/80R22.5 XMEZ2 158/150
- Rear tyres: 295/80R22.5 XMEZ 154/152
  L Steering BCB 3P

CHASSIS

- Wheelbase 6.25m / rear overhang 2.88m
- Chassis rails: 270mm-8mm
- EAS unit right, discharge right rearward
- Aluminium fuel tank 1 x 340L LHS
- LED tail lamps
- Spray suppression
- Front underrun protection
- Adblue tank 55L RHS

Optional

- Wheelbase 4.45m / rear overhang 1.98m
- Wheelbase 5.00m / rear overhang 2.25m
- Aluminium fuel tank 1 x 430L LHS
- Aluminium fuel tank 1 x 620L LHS

ELECTRICAL POWER SUPPLY

- Alternator 80A, batteries 2 x 175Ah

AERODYNAMICS

- Roof spoiler adjustable high set
  with side collars long set

BODY & PREPARATION

- Engine speed control connector on chassis
- Body function application connector on chassis
- CAN connector J1939 CAN application connector

BRAKE SYSTEM

- Auxiliary exhaust brake
- Parking brake control with test position
- Brakes discs on front & rear axle(s)

DRAWBAR & TRAILER EQUIPMENT

- Pneumatic trailer connection C type
- 24V trailer electric connection

GVM / GCM

- Max GVM 19,000 kg
- Max GCM 28,000 kg

POWER TAKE OFF (PTO)

- Gearbox PTO control, no first gearbox PTO

APPLICATION CONDITIONS

- Unheated moisture separator with pre-filter
- Air intake behind cab, high

SERVICE & MAINTENANCE

- Warranty: Vehicle 3yr, driveline 3yr / 200,000km
- Standard service interval

VEHICLE DELIVERY

- Standard toolkit

XB 290

FA 4x2 Rigid, 19t

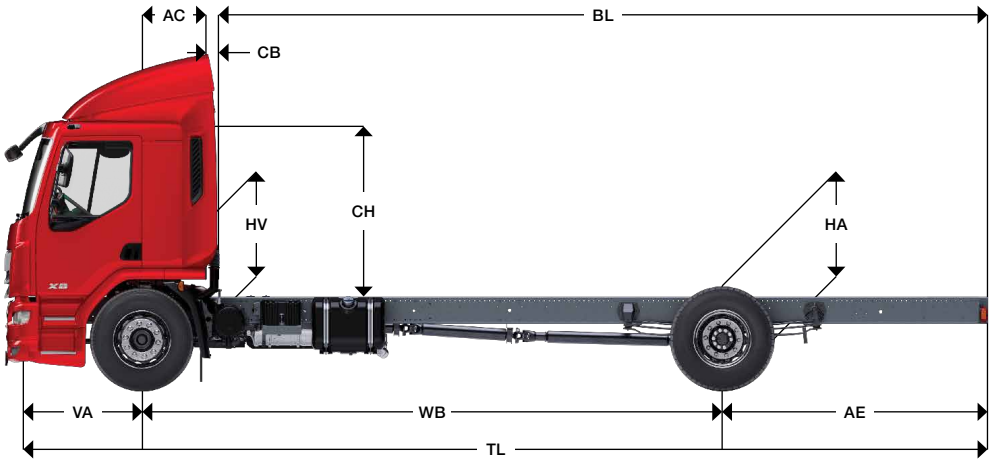

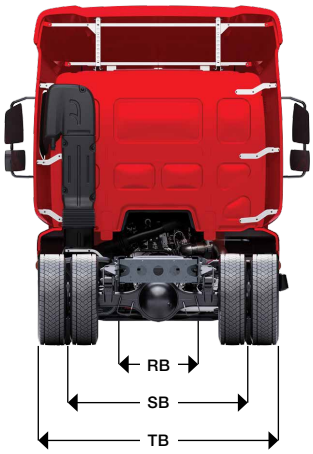

	Wheelbase		Unladen Weight†			Gross Carrying Capacity			Variable Dimensions								
	WB	AE[1]	Front	Rear	Total	Front	Rear	Total	AC	CB[2]	CH	BL[3]	TL	HA[4]	HA[5]	TK[6]	TW[7]
DAY CAB	4.75	2.13	3463	1794	5257	3037	7206	10243	0.28	0.22	1.88	6.82	8.22	0.99	0.97	16.51	17.69
	5.00	2.25	3481	1815	5296	3019	7185	10204	0.28	0.22	1.88	7.19	8.59	0.99	0.97	17.20	18.39
	6.25	2.88	3544	1921	5465	2956	7079	10035	0.28	0.22	1.88	9.07	10.47	0.99	0.97	20.64	21.86
	6.60	2.85	3571	1934	5505	2929	7066	9995	0.28	0.22	1.88	9.39	10.79	0.99	0.97	21.60	22.83
SLEEPER CAB	4.75	2.13	3600	1783	5383	2900	7217	10117	0.68	0.22	1.88	6.42	8.22	0.99	0.97	16.51	17.69
	5.00	2.25	3617	1805	5422	2883	7195	10078	0.68	0.22	1.88	6.79	8.59	0.99	0.97	17.20	18.39
	6.25	2.88	3678	1912	5590	2822	7088	9910	0.68	0.22	1.88	8.67	10.47	0.99	0.97	20.64	21.86
	6.60	2.85	3704	1926	5630	2796	7074	9870	0.68	0.22	1.88	8.99	10.79	0.99	0.97	21.60	22.83

Other Dimensions					
VA	HV[9]	HV[10]	RB	SB	TB[11]
1.34	1.02	0.95	0.79	1.83	2.47

1. Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
2. CB is based on standard air intake and/or exhaust.
3. Cab height is measured from frame member to closed cabin roof hatch.
4. Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
5. Unladen height at centre of driven axle(s).
6. Laden height at centre of driven axle(s).
7. Turning circle between kerbs.
8. Turning circle between walls.
9. Unladen height at centre of front axle(s).
10. Laden height at centre of front axle(s).
11. Overall width at rear

Note: All dimensions are in metres (m) and weights in kilograms (kg)

No rights can be derived from this publication. DAF Trucks Australia reserves the right to change product specifications without prior notice. For the most recent information, contact your authorised DAF dealer.

DAF Trucks Australia

66 Canterbury Road
Bayswater VIC 3153

Phone (03) 9721 1500