Specification Sheet

XF 530

FTT 6x4 Prime Mover

*Some optional equipment maybe shown in this brochure

ENGINE
Power: XF 530, PACCAR MX-13 (390 kW / 530 hp) Torque: 2,700 Nm @ 900 - 1,125 rpm

GVM	GCM
25,600 kg	70,000 kg

Max. front 7,500 kg
Max. rear 18,000 kg

XF 530

FTT 6x4 Prime Mover

CAB EXTERIOR

- Day, Sleeper Cab or Sleeper High Cab, mechanical suspension
- Aerodynamic bottom plate
- Central door locks with 2 remote controls, 2 keys
- External sun visor midnight blue translucent
- Main mirrors
- Electrically adjustable mirrors
- LED head lights
- Head light beam for left-hand traffic
- Daytime running lights with fog & cornering lights in bumper

Optional

- Double glazed window in rear cab wall

CAB INTERIOR

- Soft grip steering wheel
- Grey dashboard finish
- Luxury air driver's seat with heating & armrest
- Foldable cinema passenger seat
- Centre console with open storage & dashboard table
- Sleeper Cab: Normal level lower bunk
- Refrigerator: 33L capacity
- Sleeper Cab: storage drawer under bunk
- Sleeper Cab: Curtains along windscreen & side windows
- Sleeper Cab: 'Xtra Comfort' pocket sprung mattress
- Air conditioning & Automatic Cab Climate Control
- Electric windows control
- 4 USB ports

COLOURS

- Cab colour: Crystal White E1980
- Cab coloured side collar
- Cab coloured lamp/headlamp panel & bumper
- Cab coloured mirrors
- Chassis colour: Grey

SUSPENSION & AXLES

- Front axle: 2 x 7.5t, parabolic, 165N
- Rear axle: 2 x 9.05t, DAF air, SR1360T
- Axle load monitoring

SAFETY SYSTEMS

- Manual isolation main switch
- SRS driver's air bag
- Anti-theft system, engine immobiliser
- Lane departure warning system
- Vehicle stability control
- Reverse warning alarm
- DAF corner view camera - 285 degree wide view
- Speed limiter setting 100 km/h
- Adaptive Cruise Control with Foward Collision Warning (FCW) & Advanced Emergency Braking System (AEBS)

Optional

- DAF Side & Turn Assist

COMMUNICATION

- FMS connector extended, prepared
- DAF infotainment system: 10.1" display with FM/DAB+, Apple CarPlay™ and Android Auto™ phone mirroring; 5 speakers
- Antennas: FM/DAB/DAB+ radio frequencies, 2 x cellular for use by mobile phones, GNSS for location purpose
- Driver Performance Assistant (DPA)

DRIVELINE

- Engine: 390 kW (530 hp), PACCAR MX-13
- Euro 6 exhaust emission
- Auto engine stop 5 minutes
- Transmission: Auto, TraXon 16TX2640OD 16 speeds
- Gearbox ratio: 12.92-0.77
- Rear axle ratio: 3.40
- Mechanical differential lock with ASR
- ASR (anti-slip regulation) system

XF 530

FTT 6x4 Prime Mover

WHEELS & TYRES

- Goodyear tyres
- Front tyres: 315/80R22.5 KMAXS3 158/150
- Rear tyres: 11R22.5 MSS 148/145
- Disc wheels aluminium, Alcoa Dura-Bright
- Wheel protection rings

CHASSIS

- Wheelbase 3.9m / rear overhang 1.55m
- Chassis rails: 310mm - 6mm
- EAS unit right, Exhaust discharge to the right-hand side
- Aluminum fuel tank 605L LHS, 400L RHS, Height 700mm
- LED tail lamps
- Spray suppression
- Front Underrun Protection System (FUPS)
- Adblue tank 80L LHS

ELECTRICAL POWER SUPPLY

- Alternator 110A, batteries 2 x 175Ah

AERODYNAMICS

- Roof spoiler adjustable high set with side collars long set

BODY & PREPARATION

- Hardwired body signals and warnings
- Engine speed control connector
- Preparation for aftermarket switches
- J1939 CAN application connector

VEHICLE DELIVERY

- Standard toolkit

BRAKE SYSTEM

- MX Engine Brake
- Electro-pneumatic controlled park brake with Auto Apply functionality
- Disc brakes on front & rear axle(s)
- Spring brake cylinder on rear tandem axle 2

DRAWBAR & TRAILER EQUIPMENT

- Pneumatic trailer connection C type
- 24V trailer electric connection
- Low speed trailer brake
- 1 x 7 pin detachable EBS cable
- 1 x 7 pin detatchable trailer lighting cable

GVM / GCM

- Max GVM 25,600 kg
- Max GCM 70,000 kg

POWER TAKE OFF (PTO)

- First gearbox PTO N../1c-Z

APPLICATION CONDITIONS

- Application class 2A
- Air intake front
- Moderate climate
- Maximum ambient temperature 50 degrees
- Heated fuel filter on engine
- Unheated fuel pre-filter on chassis
- Gearbox oil cooler

Optional

- Air intake high behind cab

SERVICE & MAINTENANCE

- Warranty: Vehicle 3yr, driveline 3yr / 750,000km
- Standard service interval

XF 530

FTT 6x4 Prime Mover

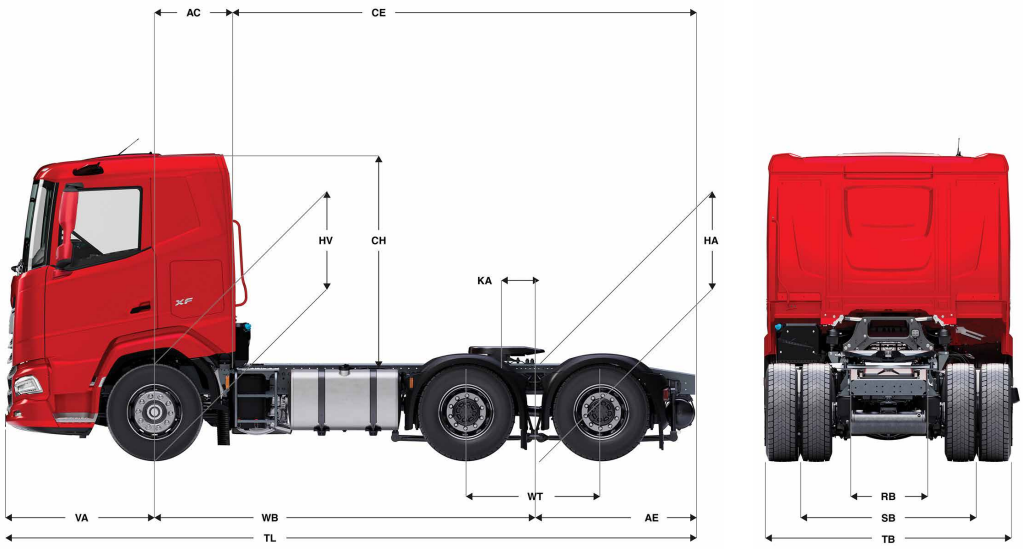

	Wheelbase		Unladen Weight†			Gross Carrying Capacity			Variable Dimensions							
	WB	AE[1]	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	TL	HA[2]	HA[3]	TK[4]	TW[5]
DAY CAB	3.90	1.55	5067	4197	9265	1433	12303	13735	0.50	4.95	2.18	6.98	1.05	1.04	13.69	15.08
SLEEPER CAB	3.90	1.55	5175	4111	9285	1325	12389	13715	0.83	4.62	2.18	6.98	1.05	1.04	13.69	15.08
SLEEPER HIGH CAB	3.90	1.55	5204	4111	9315	1296	12389	13685	0.83	4.62	2.66	6.98	1.05	1.04	13.69	15.08

Other Dimensions						
VA	WT	HV[6]	HV[7]	RB	SB	TB[8]
1.53	1.40	1.08	1.08	0.79	1.82	2.48

† Chassis and cab weight calculated with: Standard specification items only with 430 litres of fuel, 80 litres of AdBlue® and driver of 100kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

1. Other AE dimensions may be available for shown WB.
2. Unladen height at centre of driven axle(s).
3. Laden height at centre of driven axle(s).
4. Turning circle between kerbs.
5. Turning circle between walls.
6. Unladen height at centre of front axle(s).
7. Laden height at centre of front axle(s).
8. Overall width at rear. (At centre of front axle 255)

Note: All dimensions are in metres (m) and weights in kilograms (kg)

No rights can be derived from this publication. DAF Trucks Australia reserves the right to change product specifications without prior notice. For the most recent information, contact your authorised DAF dealer.

DAF Trucks Australia

66 Canterbury Road
Bayswater VIC 3153

Phone (03) 9721 1500